

# Camera link Optical Extender

## ◆ FCL-200T/R

### (Dual-Base/Medium Configuration)



### Description

Kortron, a leader in the market of pixel to pixel cabling solution, created Fiber Optics based Camera Link cable. Kortron cabling solution will be a perfect choice for overcoming the problems of facility access, capital cost, distance, EMI, ESD and bandwidth. Camera Link is a high-speed camera/frame grabber interface designed for high performance vision applications. Standard Camera Links deliver signals to 10 meters or less, occurring inflexible situations in many applications which requires longer distance image transmission between the camera and the frame grabber. Kortron's Optical Camera Link Cable can send signals up to 20km without electrical or magnetic noises that plague performance of high speed Camera Link. Kortron's Optical Camera Link solution consists of plug and play modules with FCL-200T connecting to camera and FCL-200R connecting to the frame grabber( or PC) side. The FCL-200T receives, converts and sends out video data to fiber from the camera while FCL-200R receives the optical signals, converts them back into video data and sends to the frame grabber.

### Key Features


- ◆ All of Camera-Link Interface Compliance ( Area and Line Scan)
- ◆ Support Dual-Base / Medium Configuration (CC1 ~ 4, RS232, 6 Ports, LVAL, DVAL, FVAL)
- ◆ Support Pixel clock from 20 - 85MHz
- ◆ Auto detect and Generate Pixel clock
- ◆ Zero loss and transparent transport
- ◆ Locking DC power connector
- ◆ Attaches to the compact SDR26 connectors
- ◆ Status Monitoring LEDs ( PWR, ACT, Error )
- ◆ Intelligent cable disconnect detecting ( Camera cable, Fiber cable )
- ◆ Re-synchronization buttons
- ◆ LC duplex fiber link (2-core fiber)
- ◆ Allows remote operation up to 20km

### Applications

- ◆ Machine Vision Applications
- ◆ Product inspection - PCB, LCD, Wafer
- ◆ Bar code reading and sorting
- ◆ Medical Imaging
- ◆ High precision security surveillance
- ◆ Vehicle license plate reading/recording
- ◆ Port/Harbor cargo container management
- ◆ Railroad measurement/inspection
- ◆ Intelligent Traffic Systems (ITS)
- ◆ Border Control
- ◆ Cameras placed in harsh environment
  - Nuclear plant, Chemical plant, Factory
- ◆ Long haul image transmissions
- ◆ Bridge inspection
- ◆ Military & Defense Applications
- ◆ Astronomy
- ◆ Computer microscopy
- ◆ Multi-media

# Camera link Optical Extender

## Typical Set Up Diagram

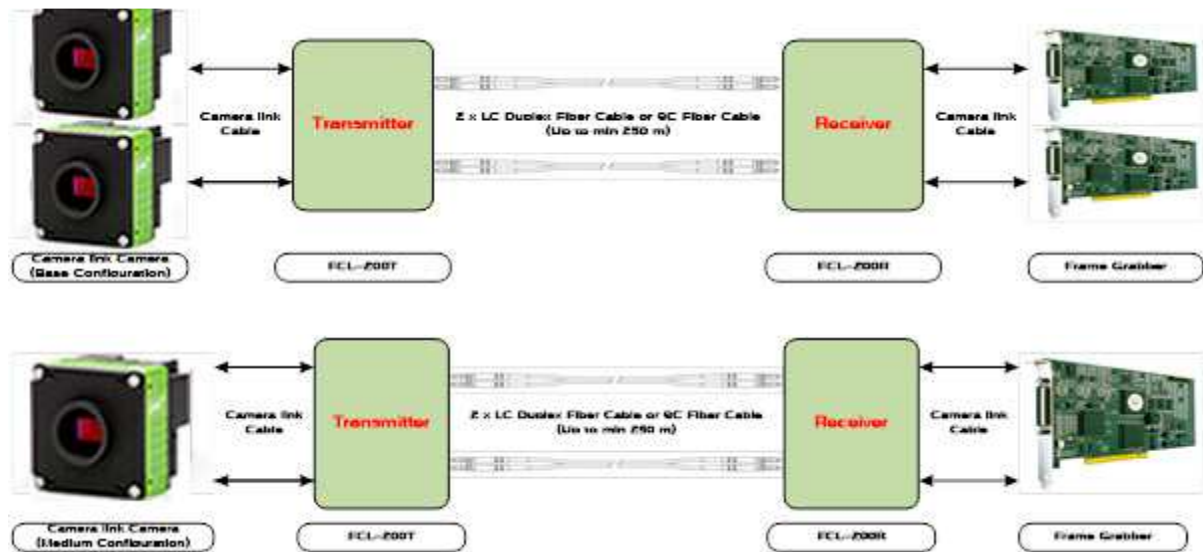

## Technical Specifications

### - General Specification

|                                 |                       |
|---------------------------------|-----------------------|
| Operating Temperature           | 0 ~ 40 [°C]           |
| Input Voltage                   | DC 5 ~ 24 [V]         |
| Typical Supply Current @ 12V DC | CM-base 250 [mA]      |
| Connector Type                  | Molex 53259-0329 Male |
| Weight (Approximate)            | 300 Gram each module  |

### - Camera link Interface

|                                |                           |
|--------------------------------|---------------------------|
| Product Model                  | FCL-200T / R              |
| Pixel Clock Range              | 20 ~ 85 [MHz]             |
| Supported Camera Configuration | Base / Dual-Base / Medium |
| Effective Data Throughput      |                           |
| Connector Type                 | Mini Camera Link ( SDR )  |

### - Optical Interface

|                             |   |
|-----------------------------|---|
| Operating Wavelength        | 850 [nm]                                  |
| Min Optical TX Output Power | -2.5 [dBm]                                |
| Transmission Distance       | Up to 250 [m]                             |
| Connector Type              | LC Duplex                                 |
| Fiber Type                  | 50/125 um or 62.5/125 um Multimode fibers |